

## DTD2R 'Alta'



## Technical Details

<b>Controls</b>	Digitally controlled, Electronic Thermostat accurate to ( $\pm 0.2^{\circ}\text{C}$ ). Set-point range (7-30°C)  7 Day Programmable User Timer which allows for 7 periods per day. <b>Modes</b> - Normal (timer), Comfort, Eco, Away and Off.
<b>Controller UI</b>	<ul style="list-style-type: none"> <li>Digital segmented display with neon graphics.</li> <li>Capacitive buttons.</li> </ul>
<b>Controller Functions</b>	<ul style="list-style-type: none"> <li>Wi-Fi for software updates</li> <li>Child Lock &amp; Heater Lock (button-based)</li> </ul>
<b>Construction</b>	<ul style="list-style-type: none"> <li>Durable epoxy-polyester powder coated steel casing with slotted upward facing grille.</li> </ul>
<b>Element</b>	Convective Aluminium Element
<b>Installation</b>	<ul style="list-style-type: none"> <li>1 H-frame wall bracket for easy fixing, already fitted. Includes plastic tilt strap.</li> </ul>
<b>Safety</b>	<ul style="list-style-type: none"> <li>Thermal cut-out. Auto reset type</li> </ul>
<b>IP Rating</b>	IP24
<b>Battery Backup</b>	No battery. Short term time retention using super cap
<b>Supply</b>	1.3 metres fitted, 2 core for fused spur installation, 1/N ~230-240 V, 50Hz Class 2, without earth wire.
<b>Colour / Finish</b>	Metal Chassis in Traffic White, RAL 9016

## Warranty & Approvals

<b>Approvals</b>	CE, UKCA, BEAB
<b>Guarantee</b>	2 Years (+3 with registration)
<b>Country of Origin</b>	United Kingdom
<b>Manufacturer</b>	Glen Dimplex Heating & Ventilation (Glen Dimplex UK Ltd)


## Product Description

DTD2R Alta panels feature built-in Wi-Fi with direct connection to your network, allowing the panel to be controlled remotely. Also includes intuitive user controls, and 7-day timer profiles (via APP).

## Key Features

- Modern panel design with top outlet grille for optimum heat circulation.
- Wi-Fi connected product.
- Customisable heating time and temperature settings.
- Smartphone app controllable via the CAPA Connect APP.
- 20cm height for use on low profile walls.

## Dimensions

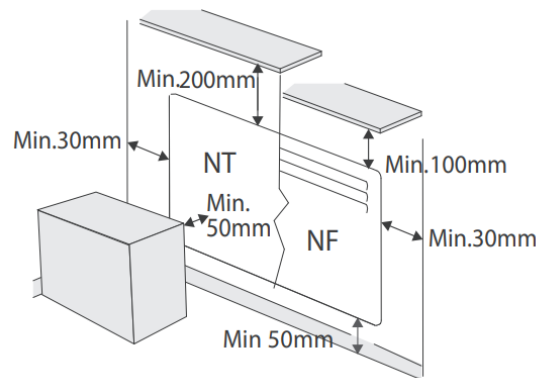

Model/Item No. (EAN-Code 5011139+EAN)	400001217	DTD2R 05	400001218	DTD2R 07	400001219	DTD2R 10	400001220	DTD2R 12
EAN	085771	085788	085795	085801				
Output (kW)	0.50	0.75	1	1.25				
Height 'D' (mm)	200	200	200	200				
Width 'C' (mm)	725	1025	1325	1525				
Depth 'E' (mm)	90	90	90	90				
Weight (Kg)	3.1	4.2	5	5.2				
Packaging Details								
Height (mm)	228	228	228	228				
Width (mm)	753	1053	1353	1553				
Depth (mm)	104	104	104	104				
Packed Weight (Kg)	3.05	4.15	5.5	6.7				
Ti	10	7	7	7				
Hi	4	4	4	4				
Pallet Quantity (2.4m high)	40	28	28	28				

## DTD4R 'Alta'



## Technical Details

<b>Controls</b>	Digitally controlled, Electronic Thermostat accurate to ( $\pm 0.2^{\circ}\text{C}$ ). Set-point range (7-30°C)  7 Day Programmable User Timer which allows for 7 periods per day.  Modes - Normal (timer), Comfort, Eco, Away and Off.
<b>Controller UI</b>	<ul style="list-style-type: none"> <li>Digital segmented display with neon graphics.</li> <li>Capacitive buttons.</li> <li>Time memory through super cap.</li> </ul>
<b>Controller Functions</b>	<ul style="list-style-type: none"> <li>Wi-Fi for software updates</li> <li>Child Lock &amp; Heater Lock (button-based)</li> </ul>
<b>Construction</b>	<ul style="list-style-type: none"> <li>Durable epoxy-polyester powder coated steel casing with slotted upward facing grille.</li> </ul>
<b>Element</b>	Convective Aluminium Element
<b>Installation</b>	<ul style="list-style-type: none"> <li>1 H-frame wall bracket for easy fixing, already fitted. Includes plastic tilt strap.</li> </ul>
<b>Safety</b>	<ul style="list-style-type: none"> <li>Thermal cut-out. Auto reset type</li> </ul>
<b>IP Rating</b>	IP24
<b>Battery Backup</b>	No battery. Short term time retention using super cap
<b>Supply</b>	1.3 metres fitted, 2 core for fused spur installation, 1/N ~230-240 V, 50Hz Class 2, without earth wire.
<b>Colour / Finish</b>	Metal Chassis in Traffic White, RAL 9016

## Warranty & Approvals

<b>Approvals</b>	CE, UKCA, BEAB
<b>Guarantee</b>	2 Years (+3 with registration)
<b>Country of Origin</b>	United Kingdom
<b>Manufacturer</b>	Glen Dimplex Heating & Ventilation (Glen Dimplex UK Ltd)


## Product Description

DTD4R Alta panels feature built-in Wi-Fi with direct connection to your network, allowing the panel to be controlled remotely. Also includes intuitive user controls, and 7-day timer profiles (via APP).

## Key Features

- Modern panel design with top outlet grille for optimum heat circulation.
- Wi-Fi connected product.
- Customisable heating time and temperature settings.
- Smartphone app controllable via the CAPA Connect APP.

## Dimensions

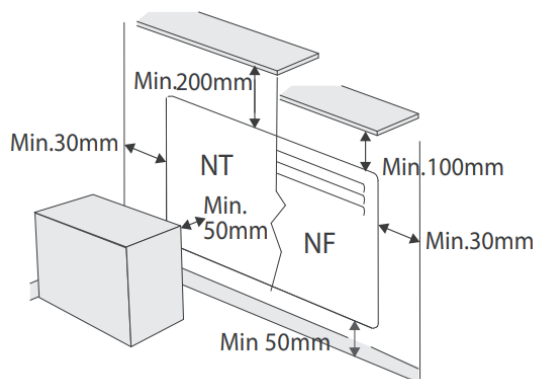

Model/Item No. (EAN-Code 5011139+EAN)	400001221	DTD4R 05	400001222	DTD4R 07	400001223	DTD4R 10	400001224	DTD4R 15	400001225	DTD4R 20
EAN	085818		085825		085832		085849		085856	
Output (kW)	0.50		0.75		1		1.5		2	
Height 'D' (mm)	400		400		400		400		400	
Width 'C' (mm)	525		625		725		1025		1125	
Depth 'E' (mm)	90		90		90		90		90	
Weight (Kg)	3.6		4.2		5		5.8		7.5	
<b>Packaging Details</b>										
Height (mm)	428		428		428		428		428	
Width (mm)	553		653		753		1053		1353	
Depth (mm)	104		104		104		104		104	
Packed Weight (Kg)	4.1		4.6		5.4		7.4		9.7	
Ti	7		11		10		7		7	
Hi	4		2		2		2		2	
Pallet Quantity (2.4m high)	28		22		20		14		14	