


### Product Description

- Floor box manufactured from galvanised steel
- 25 & 20mm knockouts to accept flexible conduit
- Frame & lid moulded from high impact polycarbonate, colour equivalent: RAL7031
- Galvanised lid insert for strength
- Easy grip recessed lifting handle
- Compact design 218 x 150mm floor cut-out
- Designed to accept 1 accessory plates
- Large range of accessory plates, colour equivalent: RAL7035
- Special plates available to order
- Suitable for carpeted floors only with standard Frame & Lid
- Clean Earth Sockets available
- ABS Plastic Frame & Lid Load Test 550 KG
- Steel Frame & Lid Load Test 740 KG

### Specifications

Floor Cut Out:	218mm x 150mm
Depth:	86mm
Plug Top Clearance:	36mm
Overall Frame & Lid:	230mm x 160mm
Frame Lid Recess:	6mm
Accessory Plates:	185mm x 89mm

### Plug Top Clearance Diagram

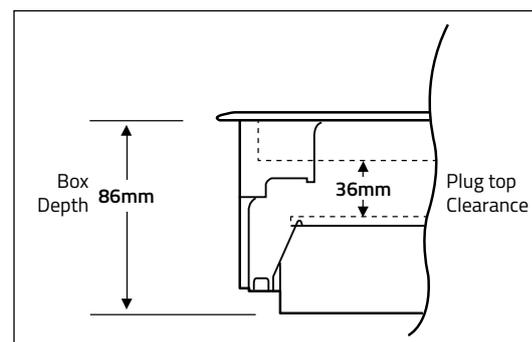

### Frame & Lid Options for TFB1

Designed specifically for high traffic environments such as schools and colleges.



**PCL12R346**

12mm Recessed Powder Coated Steel



**SSL12R346**

12mm Recessed Stainless Steel

**Contact:** sales@floorbox.co.uk | **Visit:** www.floorbox.co.uk

Customer notice: Due to our policy of continuous improvement, Tass Cable Management Ltd reserve the right to change product specifications without notice. Tass Cable Management Ltd © | Floorbox.co.uk © | 2017 | All rights Reserved.