


TKS 32

Membrane cable entrie with strain relief

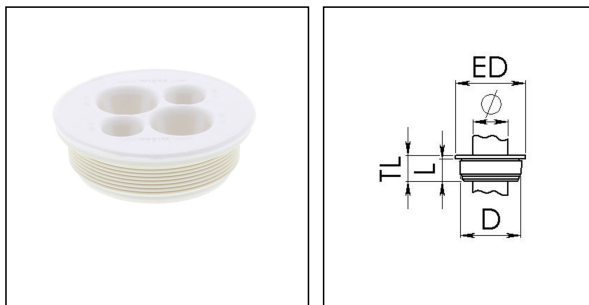

Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

Material	Polypropylene
Material membrane	TPE
Temp. range min	-30 °C
Temp. range max	80 °C
Glow wire test	960 °C
Protection class	IP66
Ø Connection thread D	32
Ø cable diameter min	4 mm
Ø cable diameter max	12 mm
External diameter ED	37 mm
Total length TL	12 mm
Ø Drilling	32 mm
Product Color	RAL 9001
Order no. RAL 9001	10108617
Type	TKS 32
Packing unit	10
ETIM-Classification	EC000451

Remarks:

- Flammability: UL94-V0
- for cable entries 2 x 7-12mm + 2 x 4-8mm

22.02.2018

