



Technical Specification

25m + 3m Reverse Open Reel 0MU2513FL3IP




Features

- » Innovative reverse reel, with weatherproof socket
- » Safety thermal cut-out
- » Power LED indicator
- » IP54 rated weatherproof socket
- » Compatible with wall mount bracket

Description

This innovative design allows you to wall mount the extension reel near the wall power outlet and extend the power socket closer to the required area. The drum's construction provides reliable protection when in use, transported or stored. The compact design is perfect for the home, garden and light industrial use. Using highly visible green cable, this 'reverse' extension reel provides an IP54 rated weatherproof 13 amp socket outlet. The drum includes an LED indicator, and has a built-in safety thermal cut-out for protection against overloading when fully reeled. Optional wall bracket available.

Line Diagrams

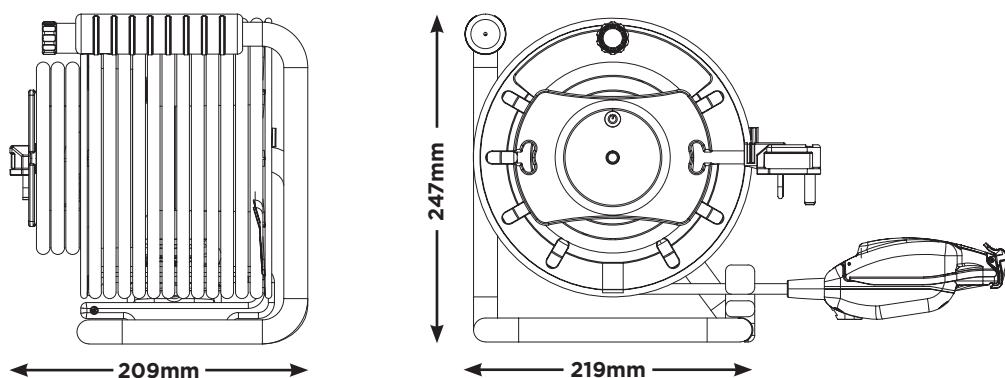

Technical Specifications

| | |
|--------------|---|
| Standards | BS EN 61242. ASTA Approved |
| Maximum Load | 720W/240V - Fully Wound 3120W/240V - Fully Unwound |
| Switch | Double Pole |
| Cable length | 25+3m |
| Cable Size | Cable Size - 1.25mm ² (H05VV-F) |












Lic 940



Product Information

| | | | |
|-------------------------|-----------------------------------|--------------------------|--------------------------|
| Part No | OMU2513FL3IP | Qty | 1 |
| Type | Reverse Reel with Pull Out Socket | Shipping Carton Info (m) | H:0.27 x W:0.26 x D:0.27 |
| Cable Type | PVC | CBM (m ³) | 0.019 |
| Cable Length (m) | 25+3m | G.W (kg) | 4.5 |
| Amp | 13 | EAN Barcode | 5015056526553 |
| Product Dimensions (cm) | H:24.7 x W:22 x D:21 | ITF Barcode | 05015056526652 |

Product Range

| Product Image | Cat No | Description | Length (m) | Sockets | Amps |
|---|----------------|-----------------------------|------------|---------------------------|------|
|  | CMU10134SL | Cassette Reel | 10m | 4 Sockets | 13 |
|  | HMU15134SL | Case Reel | 15m | 4 Sockets | 13 |
|  | OMU25134SL | Open Reel | 25m | 4 Sockets | 13 |
|  | OLU50134SL | Open Reel | 50m | 4 Sockets | 13 |
|  | OTLU40134SL | Heavy Duty Metal Open | 40m | 4 Sockets | 13 |
|  | OMU2513FL3IP | Reverse Open Reel | 25+3m | 1 Socket | 13 |
|  | OATRU3013FL3IP | Anti-Twist Reverse Reel | 30+3m | 1 IP54 Socket, + LED | 13 |
|  | OATFU30134SL | Anti-Twist Fixed Socket | 30m | 4 Sockets, Switch + LED | 13 |
|  | OMU25132USL | Open Reel with USB Charging | 25m | 2 Sockets, Switched + USB | 13 |

Masterplug are proud to offer a 5 year warranty on its range of Pro-XT portable power products from the date of purchase.
Please see our website www.masterplug-proxt.com for more details.

UK Sales & Distribution Centre

Luceco plc
Stafford Park 1, Telford, Shropshire, England, TF3 3BD
Tel: +44 (0) 1952 238 100 Fax: +44 (0) 1952 238 180
Email: sales@masterplug.com
www.masterplug-proxt.com
Tech Help Line: (UK) 03300 249 279
(Non UK) +44(0) 1952 238 100



**POWER
AT WORK**

