



## **KFLM04G125-GLD**

4w LED Antique Filament G125, 20000hrs, Gold Finish



## **Product Overview**

Kosnic's Home range of LED products brings the energy saving and safety capabilities of LED technology for general and decorative lighting to the home. Offering a range of classic shapes, all Home LEDs are designed to replace traditional filament lamps. The Antique Filament LED lamps have a special coating with a golden finish, that shifts the light to a warmer colour temperature of 2500k. Such light creates an ultra warm and cozy living space while offering huge energy savings over filament lamps without compromising on brightness. The lamps can quickly replace filament products in domestic and hospitality lighting applications, and once in place rapid payback is achieved.

# Features

Save energy up to 88% compared with an incandescent filament lamp.

Linear LED filament provides a traditional appearance.

Popular B22 and E27 caps.

Even light distribution.

High lumen output, up to 100lm/W.

Long life of 20,000hrs.

Instant start.

Negligible UV output.

Mercury free.

# Specifications

	KFLM04G125/B22-GLD-N27-K	KFLM04G125/E27-GLD-N27-K
Fitting	B22	E27
Shape / Type	Globe	Globe
Colour Finish	Gold	Gold
Optics Type	Golden Coating	Golden Coating
Wattage (w)	4	4
Equivalent Wattage (w)	35	35
Total Lumens (lm)	400	400
Input Current (mA)	29	29
Input Voltage	220-240Vac	220-240Vac
CCT Temperature (k)	2700	2700
CCT Name	Warm White	Warm White
Rated Life (hrs)	20000	20000
Switch Cycles	50000	50000
CRI	80	80
Dimmable	No	No
Retrofit	Yes	Yes
Power Factor	0.60	0.60
Start Time (s)	0.10	0.10
Warm-up Time (s)	0.5	0.5
Length (mm)	173	175
Width (mm)	125	125
Depth (mm)	125	125
Ambient Temperature (°C)	-20 to 40	-20 to 40


## Energy Label

	KFLM04G125/B22-GLD-N27-K	KFLM04G125/E27-GLD-N27-K
Energy Class	A++	A++
Energy Consumption (kWh/1000h)	4	4


## Packaging

	KFLM04G125/B22-GLD-N27-K	KFLM04G125/E27-GLD-N27-K
UPC Code	5060063429625	5060063429601
Outer Box Length (mm)	660	660
Outer Box Width (mm)	400	400
Outer Box Height (mm)	200	200
Volume	0.0528	0.0528
Box Quantity	15	15
Outer Box Weight (kg)	4.1	4.1

KFLM04G125/B22-GLD-N27-K

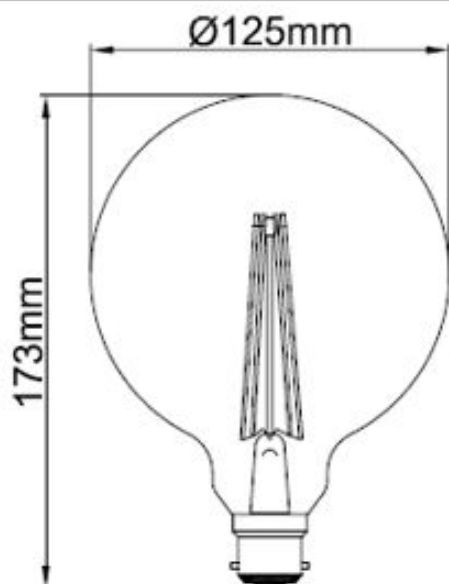


KFLM04G125/B22-GLD

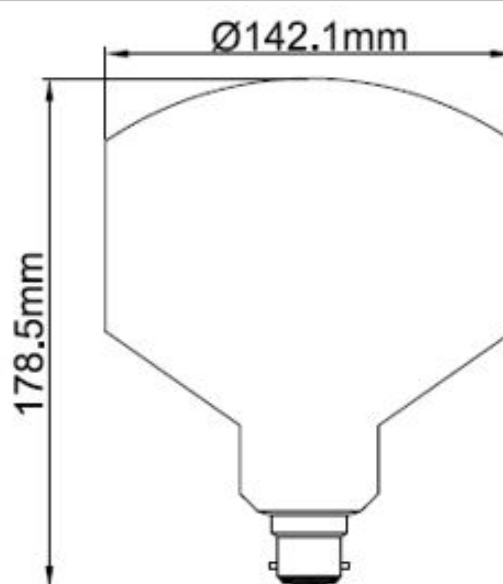


R125-B22 (IEC 60630)

KFLM04G125/E27-GLD-N27-K

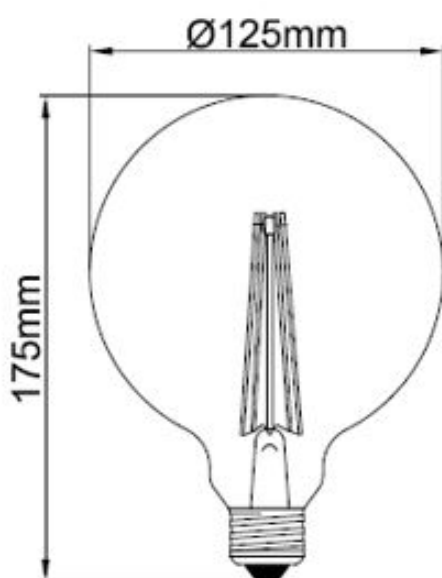


KFLM04G125/E27-GLD

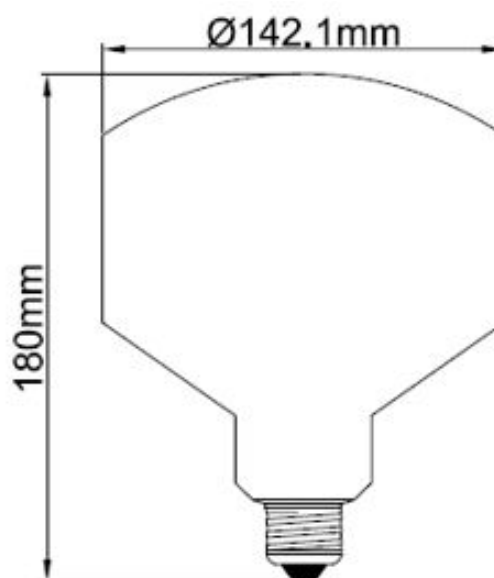

R125-E27 (IEC 60630)

KFLM04G125/B22-GLD-N27-K  
KFLM04G125/E27-GLD-N27-K

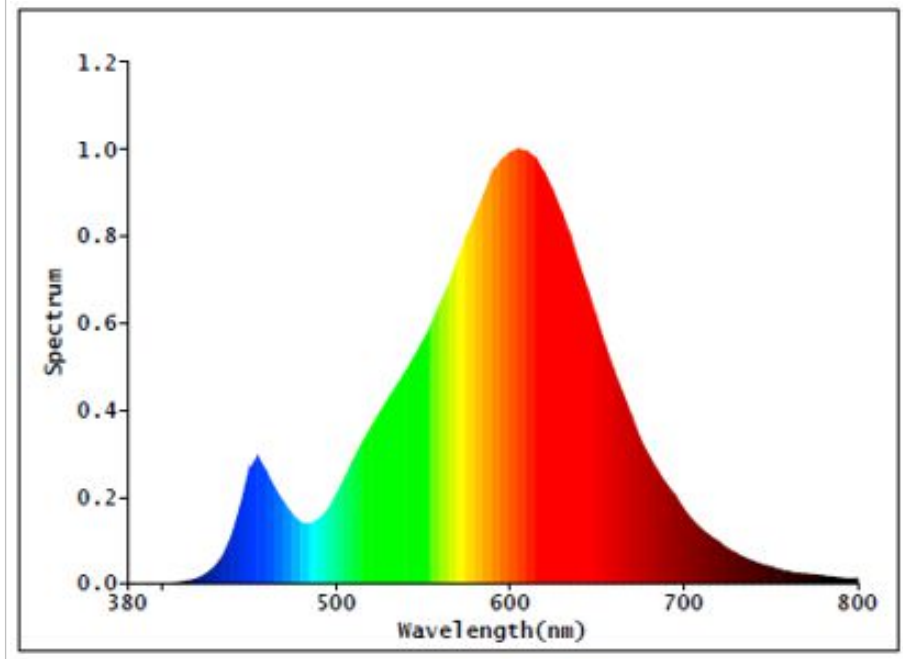

Datasheet generated from <http://www.electrika.com> last updated Friday, November 17, 2017 3:10:21 PM