

ATC Riviera Outdoor Quartz Infra-Red Electric Heaters



ATC Riviera 2000W Infrared Heater



ATC Riviera 4000W Infrared Heater



ATC Riviera 6000W Infrared Heater

Waterproof IP55
'Feel the Heat'



Description

| Model | Riviera 2000W | Riviera 4000W | Riviera 6000W |
|--------------|---------------|---------------|---------------|
| Product Code | RIV200 | RIV400 | RIV600 |
| Colour | Black | Black | Black |

High Performance

The Riviera High Performance range of Outdoor Quartz Infra-Red electric heaters are suitable for many applications, industries and environments.

Fitted with Gold lamps the heaters provide a comfortable level of heat. The Riviera Heaters are unique in that they can be mounted on the Wall, on the Ceiling / Roof or can be Hung from a height to provide heat in unusual locations.

Available in three sizes, 2000W, 4000W and 6000W, rated IP55 Weatherproof, there is a Riviera Heater for every application.

Product Features

- Modern Design
- Parabolic Reflector for Even Spread of Heat
- Instant Heat
- Creates Comfortable Environment
- 3 Sizes; 2000W – 4000W – 6000W
- Energy Efficient
- Costs £0.17p per kWh to run
- Multiple Mounting Heights
- Multiple Mounting options – Wall – Ceiling – Hung
- Unique adjustable design allows up to 30° of directional adjustment (4000W & 6000W Versions)
- Suitable for Commercial – Industrial Applications
- Maintenance Free
- Easy to Install
- IP55 Weatherproof



Restaurants



Pubs



Factories



Hotels



Warehouses



Stadia

ATC Riviera Outdoor Quartz Infra-Red Electric Heaters

Technical Details

Description

| Model | Riviera 2000W | Riviera 4000W | Riviera 6000W |
|--------------|---------------|---------------|---------------|
| Product Code | RIV200 | RIV400 | RIV600 |
| Colour | Black | Black | Black |

Electrical Specifications

| | | | |
|----------------------|---------|--------------------|--------------------|
| Power output (Watts) | 2000 | 4000 | 6000 |
| Voltage | 220-240 | 220-240 | 220-240 |
| Frequency (Hertz) | 50-60 | 50-60 | 50-60 |
| Current (Amps) | 9 | 18 | 3 x 9 |
| Lamps | 1 | 2 | 3 |
| Lamp Arrangement | Single | Stacked Vertically | Stacked Vertically |
| Lamp type | Gold | Gold | Gold |
| Emmission | IR-A | IR-A | IR-A |

Mounting and Installation

| Installation | Wall/Ceiling/Hanging | Wall/Ceiling/Hanging | Wall/Ceiling/Hanging |
|--|----------------------|----------------------|----------------------|
| Mounting height | 2.5-3 | 3-4 | 3-4 |
| Heating Area (M ²) * @45° | 10 | 24 | 32 |
| Heating Area (M ²) * when hung | 10 @ 3m | 32 @ 4m | 48 @ 4m |
| Minimum cable size | 3 x 1.5 ² | 3 x 2.5 ² | 5 x 1.5 ² |
| Supplied with or without cable | Without | Without | Without |
| Lamps switchable or all together | N/A | All Together | All Together |
| Dimmable (With controller) | Yes | Yes | Yes |
| With/without grill | With | With | With |

Dimensions & Weight


| | | | |
|-------------------------|-------------|-------------|-------------|
| Dimensions (HxWx D) mm | 235x496x313 | 375x496x313 | 515x496x313 |
| Weight (Kg - Nett) | 2.2 | 3.0 | 3.8 |
| IP Rating | IP55 | IP55 | IP55 |

Approvals

| | | | |
|----------------|---------|---------|---------|
| Certifications | CE, IMQ | CE, IMQ | CE, IMQ |
|----------------|---------|---------|---------|


Heating Area m²

Wall Mounted 45°

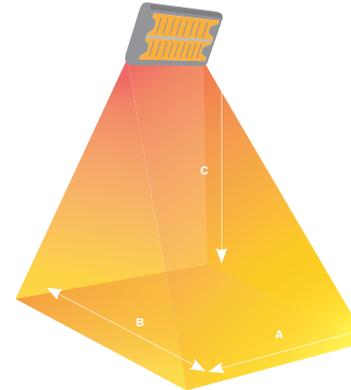


| Model | Wall Mounted 45° | | |
|--------|------------------|---|---|
| | A | B | C |
| RIV200 | 5 | 2 | 3 |
| RIV400 | 8 | 3 | 4 |
| RIV600 | 8 | 4 | 4 |

Ceiling Mounted

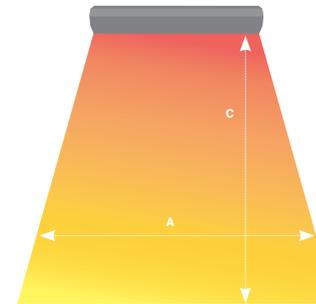

| Model | Ceiling Mounted | | |
|--------|-----------------|---|---|
| | A | B | C |
| RIV200 | 5 | 2 | 3 |
| RIV400 | 8 | 4 | 4 |
| RIV600 | 8 | 6 | 4 |

Side View

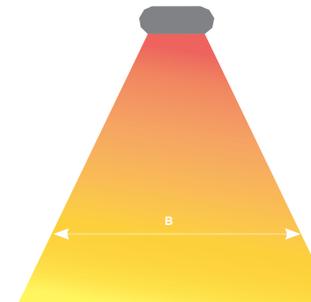

End View

It is recommended to install Outdoor radiant heaters protected from strong breezes or crosswinds. Based on average ambient temperature of 10°C.