

Tornado IP65 LED Non-Corrosive 2X30W LED Grey

Product Datasheet



Description

LED Performance allows point-to-point replacement of existing fluorescent luminaires

Light output exceeds performance of T8 and T5 fluorescent

Unique luminaire fixing clip design allows option of mounting onto BESA box

Lockable heavy-duty stainless steel clips supplied as standard for added safety and security


Self-test emergency as standard

LED lifespan L70 35,000 hours

Non-dimmable

Supplied c/w integral driver

Code	Description	Lamp
ATORLED2X5	2X30W	LED
LED Information		
Total (Watts)	2X30W	
Lumens Delivered	6480lm	
Lm/W	108 Lm/W	
CRI	Ra 80	
CCT	4000K	
Input	230V	
Beam Angle (Degrees)		
Options		
/M3	Emergency	
/MWS	Integral Microwave Sensor	

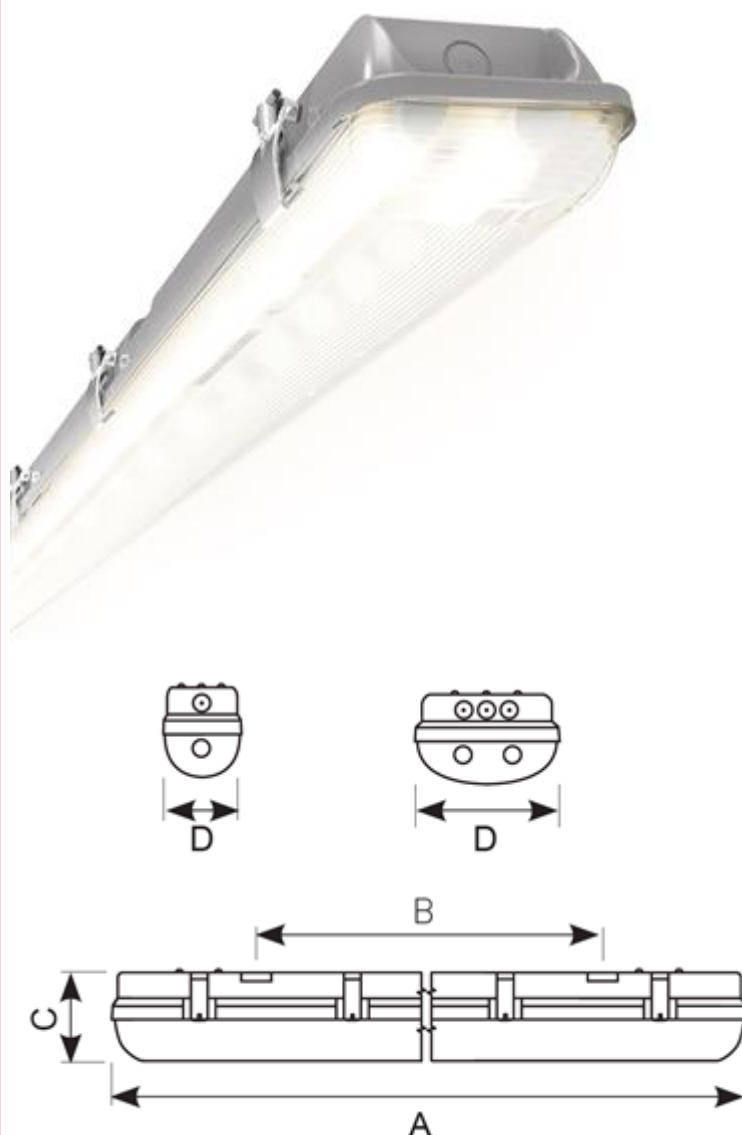

$$A = 1566 \text{ B} = 960 \text{ C} = 74 \text{ D} = 118$$

