

ERA DoorCam - Smart Home WiFi Video Doorbell



Features

- Ultra slim design which is available in Black or White
- The video camera has a 180° field of view and records in crystal clear 720p HD resolution
- Video on demand with Live View
- IP65 rated Dust and Water Tight
- Operating between -30° and +50°C, to work rain or shine
- Infrared night vision ensures operation day and night
- Motion zones and customisable to focus on specific areas
- It's powered by connection to your existing doorbell wiring or using our plug in power supply
- Connects to your home WiFi network
- Bank-grade encryption of your data ensures privacy
- DIY install or a professional installation by a qualified electrician
- FREE Cloud Recording for 12 months
- Easy setup via Smartphone App

Key Features

- **Answer your door wherever you are** - Access via you smartphone and two way talk
- **See your caller realtime** - Live view from integrated camera
- **Adaptable to you** - Adjustable speaker and microphone volume, brightness and colour
- **Hear it ring from anywhere** - Add up to 4 WiFi plug-in chimes around your home
- **Video or PIR Motion detection** - Snapshots and short videos at your disposal

Search for the free
'ERA DoorCam' App



ERA DoorCam - Smart Home WiFi Video Doorbell

Ordering Details

Product	Part No.
ERA DoorCam	
Black	ERA-DOORCAM-B
White	ERA-DOORCAM-W
ERA Chime	
Plug In WiFi Chime	ERA-WIFI-CHIME-W

Technical Information

ERA DoorCam

Item	Parameter
Power Supply	10V 5W transformer with no support to mechanical chime. 16V 10W & 16V 30W transformer supports mechanical chime. Does not support digital or wireless chime except ERA WiFi Chime
Camera	720p HD, H.264, 500ms Latency
Lens	180° Horizontal field of view, fish-eye lens
Frames Per Second (FPS)	30fps
Night Vision	IR LED, up to 15ft, Built-in Light Sensor, Auto lighting
Video Settings	Brightness, Contrast, Saturation
PIR:	
Adjustable Sensitivity	Disable - High
PIR Detection Angle	110°
Motion Detection	15ft for Horizontal motion
Video Motion Detection:	
Adjustable Sensitivity	Disable - High
Adjustable Region	9 sections to select from
Motion Detection	15ft for Horizontal motion
App Compatibility	iOS 10 +, Android 5 +
WiFi	1x1, 802.11 b/g/n
WiFi Antenna return loss	-10dB
Operating Conditions	Temperature: -30°C ~ +55°C Humidity: ≤80% (non-condensing)
Dimensions (L x W x H)	140mm x 50mm x 25mm
EAN	Black - 5054040048664
EAN	White - 5054040048657


Packaging

Kit Content

Includes: DoorCam x 1, WiFi Chime x 1, Operating and Installation Manual and User Manual

ERA reserves the right to change specification without notice. It is the responsibility of the householder or installer to ensure that the finished product meets any required safety and performance specification.

Suggested Installation Layout

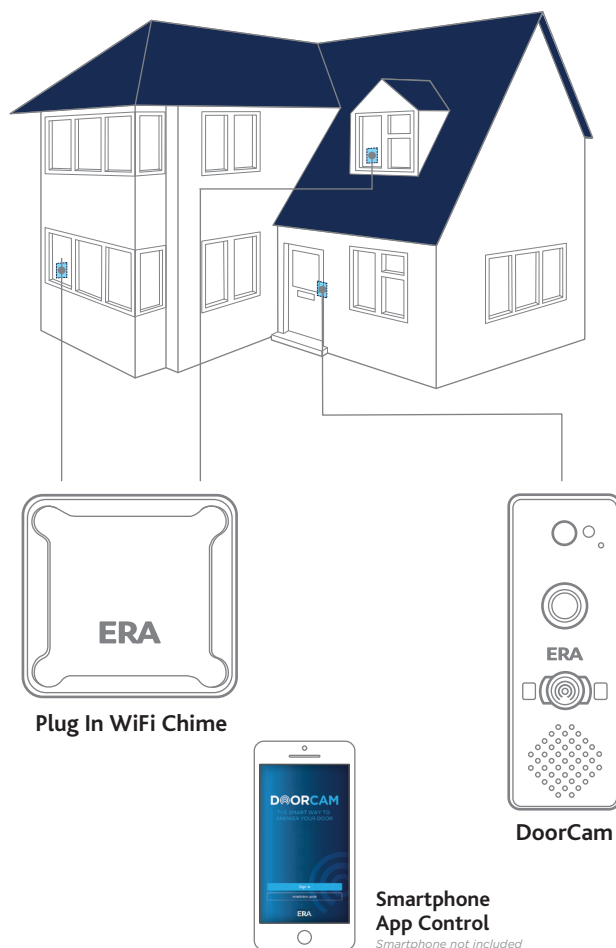

Technical Information

ERA Chime

Item	Parameter
Power Supply	UK Standard 230V AC
Power Range	230V AC +/- 10%
Power Consumption	3W (In use: Chime playing ringtone) 1W (Standby: installed well and chime not playing ringtone)
Antenna	Type: Internal PCB Antenna Gain: 2dBi (Max) Return Loss: Better or equal to -10dB
WiFi Connectivity	802.11 b/g/n
WiFi Encryption	WPA Personal WPA2 Personal
Speaker	8Ω/0.5W
Housing Material	PC Plastic
Operation Conditions	Temperature: 0°C ~ +40°C Humidity: ≤90% (non-condensing)
Dimensions (L x W x H)	75mm x 75mm x 68.5mm
EAN	5054040048671