



## **KFLM04ST64-GLD**

4w LED Antique Filament ST64, 20000hrs



## **Product Overview**

Kosnic's Home range of LED products brings the energy saving and safety capabilities of LED technology for general and decorative lighting to the home. Offering a range of classic shapes, all Home LEDs are designed to replace traditional filament lamps. The Antique Filament LED lamps have a special coating with a golden finish, that shifts the light to a warmer colour temperature of 2500k. Such light creates an ultra warm and cozy living space while offering huge energy savings over filament lamps without compromising on brightness. The lamps can quickly replace filament products in domestic and hospitality lighting applications, and once in place rapid payback is achieved.

# Features

Save energy up to 88% compared with incandescent filament lamps.

Linear LED filament provides a traditional appearance.

Popular B22 and E27 caps.

Even light distribution.

High lumen output, up to 100lm/W.

Long life of 20,000hrs.

Instant start.

Negligible UV output.

Mercury free.

# Specifications

	KFLM04ST64/B22-GLD-N27-K	KFLM04ST64/E27-GLD-N27-K
Fitting	B22	E27
Shape / Type	ST64	ST64
Colour Finish	Gold	Gold
Optics Type	Golden Coating	Golden Coating
Wattage (w)	4	4
Equivalent Wattage (w)	35	35
Total Lumens (lm)	400	400
Input Current (mA)	29	29
Input Voltage	220-240Vac	220-240Vac
CCT Temperature (k)	2700	2700
CCT Name	Warm White	Warm White
Rated Life (hrs)	20000	20000
Switch Cycles	50000	50000
CRI	80	80
Dimmable	No	No
Retrofit	Yes	Yes
Power Factor	0.60	0.60
Start Time (s)	0.10	0.10
Warm-up Time (s)	0.5	0.5
Length (mm)	146	146
Width (mm)	64	64
Depth (mm)	64	64
Ambient Temperature (°C)	-20 to 40	-20 to 40


## Energy Label

	KFLM04ST64/B22-GLD-N27-K	KFLM04ST64/E27-GLD-N27-K
Energy Class	A++	A++
Energy Consumption (kWh/1000h)	4	4

## Packaging


	KFLM04ST64/B22-GLD-N27-K	KFLM04ST64/E27-GLD-N27-K
UPC Code	0609207995616	0609207995586
Outer Box Length (mm)	710	710
Outer Box Width (mm)	360	360
Outer Box Height (mm)	190	190
Volume	0.048564	0.048564
Box Quantity	50	50
Outer Box Weight (kg)	6.05	6.05

KFLM04ST64/B22-GLD-N27-K

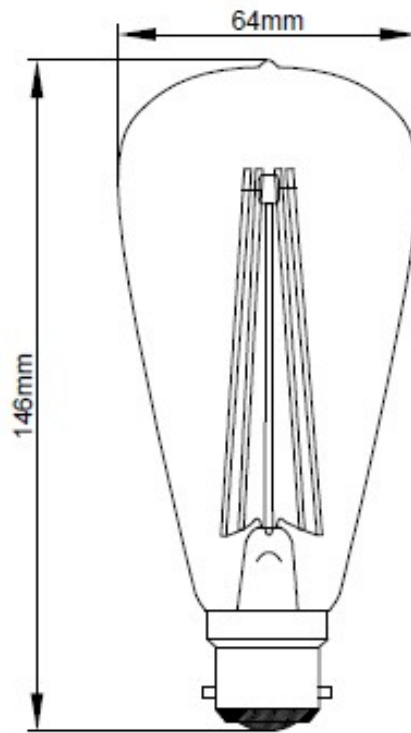

KFLM04ST64/B22-GLD

KFLM04ST64/E27-GLD-N27-K

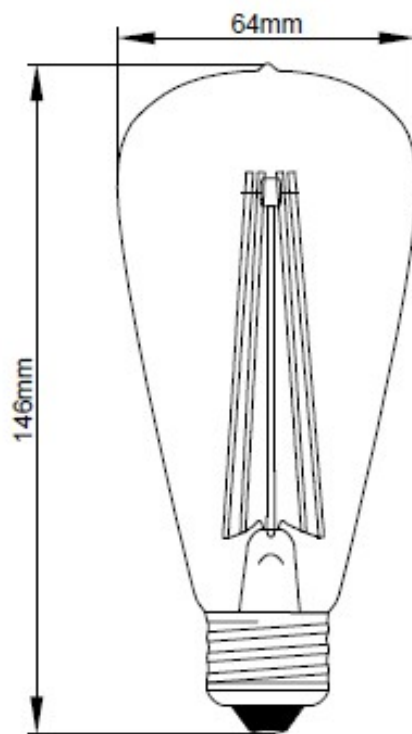

KFLM04ST64/E27-GLD

KFLM04ST64/B22-GLD-N27-K

KFLM04ST64/E27-GLD-N27-K

